

HiSKID™

MOBILE SOLAR TOWER

Rental. Sale. Own. Lease




ROTATABLE SOLAR PANEL

The rotatable solar panels help maximize solar energy utilization. In addition, this design makes it easier to deploy the trailers, as the solar panels can be positioned for the best angle regardless of the trailer's orientation.




DURABLE BASE

The thick base, featuring forklift holes and a stable shape, ensures easy relocation and safe deployment. The hot-dip galvanized surface treatment provides excellent anti-corrosive properties, making it suitable for various environments.

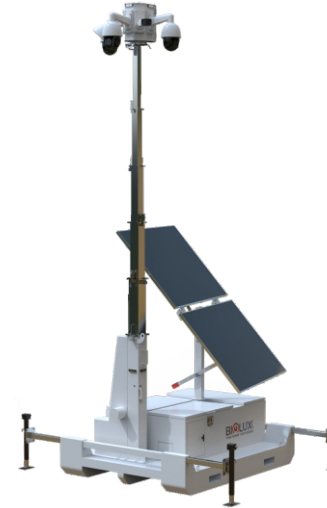

PRODUCT SKETCH

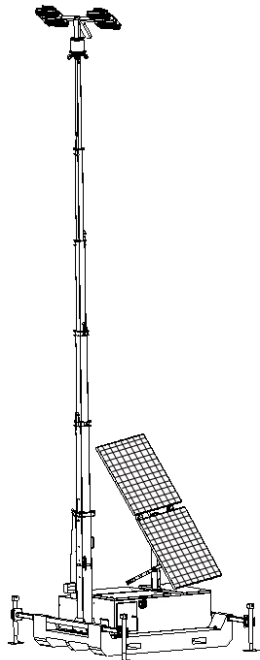

TECHNICAL DATA

Models	BL2P-G7MHSSTD	BL2P-G9EHSSTD	BL2P-G7MHSPRD	BL2P-G7MHL400PRD	BL3P-G9EHL600D
Solar Panel Type	Monocrystalline Silicon Type, Dual Facial Version, Rotatable				
Solar Panel Wattage	2*450W	2*450W	2*600W	2*600W	3*450W
PV Controller	Epever/Victron MPPT	Epever/Victron MPPT	Epever/Victron MPPT	Epever/Victron MPPT	Epever/Victron MPPT
Battery Type	Lead Acid Battery	Lead Acid Battery	Lead Acid Battery	Lead Acid Battery	Lead Acid Battery
Battery QTY	4*200AH,DC12V	4*200AH,DC12V	4*250AH,DC12V	4*250AH,DC12V	6*200AH,DC12V
Battery Capacity	9600Wh	9600Wh	12000Wh	12000Wh	14400Wh
System Voltage	DC24V, DC Voltage Converter Installed			DC24V	DC24V
Devices	CCTV Mounting Box For Surveillance System			4*100W LED Lights, 60000Lums	4*150W LED Lights, 90000Lums
Cables	Network Cable+Power Cable; Integrated Within The mast Or External Version Optional			Power Cable Integrated Within The Mast Or External for Option	
Telescopic Mast	7 Meters	9 Meters	7Meters	7 Meters	9 Meters
Lifting System	Manual Winch	Electric Winch	Manual Winch	Manual Winch	Electric Winch
AC Charger	1.5kW	1.5kW	1.5kW	1.5kW	1.5kW/2.5kW
Skid Type	Durable Base, With Forklift Holes And Lift Rings				
Outrigger	4pcs Manual Outriggers, Foldable, Y Shape				
Working Temperature	-25°C-60°C	-25°C-60°C	-25°C-60°C	-25°C-60°C	-25°C-60°C
Charging Time	8.9 Hours (Theoretical)	8.9 Hours (Theoretical)	8.5 Hours (Theoretical)	8.5 Hours (Theoretical)	8.5 Hours (Theoretical)
Running Time	72 Hours for 106W	72 Hours for 106W	72 Hours for 133W	72 Hours for 133W	24 Hours for 400W
Options	Cameras, 4G Router, NVR, Speaker, Remote Control, Antenna, Inverter, 360° Rotation And 90° Tilt for lights, Dimmable Lights, Lithium Battery				
Transport Dimensions	3270*1675*2475mm	3270*1675*2675mm	3780*1675*2475mm	3780*1675*2475mm	3250*1710*2620mm
Operate Dimensions	3290*3245*6900mm	3290*3245*8900mm	3800*3245*6900mm	3800*3245*6900mm	3250*3410*8900mm
Gross Weight	1120KG	1150KG	1170KG	1200KG	1450KG
Container Loading	20GP: 6 units, 40HQ: 14 Units	20GP: 6 units, 40HQ: 14 Units	20GP: 6 units, 40HQ: 14 Units	20GP: 6 units, 40HQ: 14 Units	20GP: 6 units, 40HQ: 14 Units